Step 1:
Hammer slightly the EZR Strip™ in the slot (Start at the side with the cables ass shown on the picture below). The phased side will slide in then.

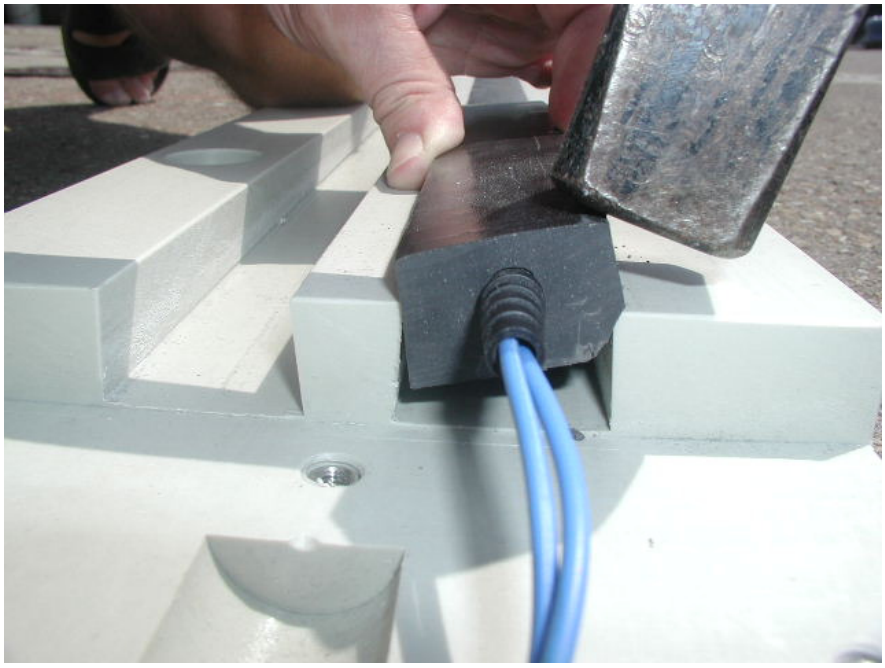

Step 2:
Do that for a certain length to get some guidance

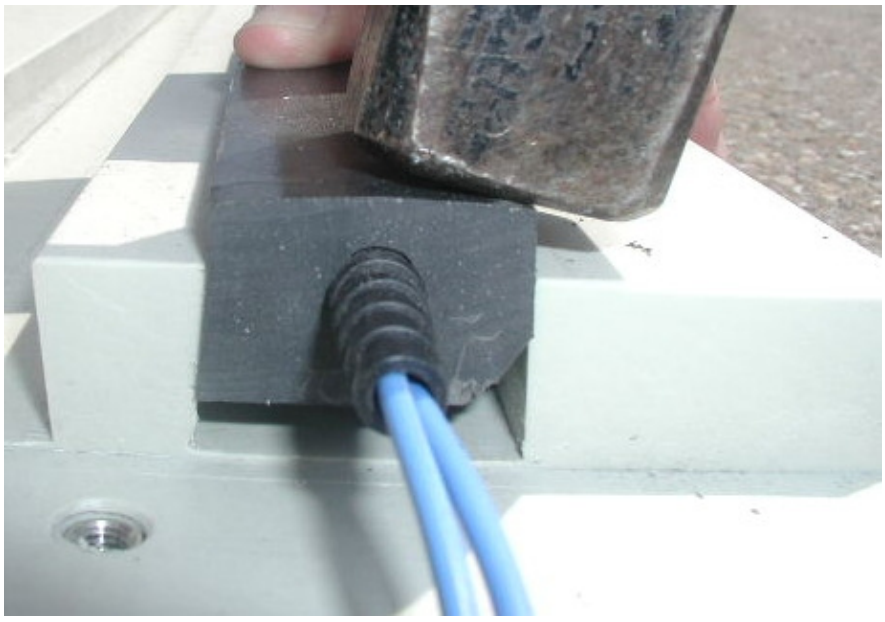

Geschäftsführer:
Friedrich Motzko
Handelsregister:
Neuburg/Donau
HRB 1468

Adresse:
Sensor Line – Gesellschaft für
optoelektronische Sensoren mbH
Carl-Poellath-Str. 19
D-86529 Schrobenhausen

Tel.: +49 / (0) 8252 / 8943-0
Fax: +49 / (0) 8252 / 8943-11
eMail: sensorline@sensorline.de
Homepage: www.sensorline.de

Bankverbindung:
Stadtsparkasse Schrobenhausen
IBAN:DE64 72151880 0000 221150
S.W.I.F.T.-BIC BYLADEM 1 SSH
VAT: DE 181 207 708

Step 3:
Use our delivered wooden tool to distribute the hammer load. The U profile shaped tool loads only the outer strip area and protects the sensor in the middle. (Also start at the cable side!)

Step 4:
Hammer the EZR Strip™ finally in the slot.
Please note: The sensor attenuation will increase slightly because of the higher pressure and squeezing. Our electronics have enough dynamic range and therefore that higher attenuation doesn't care!